

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
11 August 2005 (11.08.2005)


PCT

(10) International Publication Number
WO 2005/072790 A1

- (51) International Patent Classification⁷: **A61M 1/02** (74) Agent: REINHOLD COHN AND PARTNERS; P.O.Box 4060, 61040 Tel Aviv (IL).
- (21) International Application Number: PCT/IL2005/000123 (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (22) International Filing Date: 2 February 2005 (02.02.2005)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/540,557 2 February 2004 (02.02.2004) US
- (71) Applicant (for all designated States except US): **I.M.T. INTERFACE MULTIGRAD TECHNOLOGY LTD.** [IL/IL]; 3 Hamazmera Street, P.O.B. 2044, 70400 Ness Ziona (IL).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **DAMARI, Yaniv** [IL/IL]; 14 Shalom Alechem street, 52221 Ramat Gan (IL). **MEIR, Uri** [IL/IL]; 18910 Kibbutz Bet Hashita (IL).
- (84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:
— with international search report

[Continued on next page]

(54) Title: DEVICE FOR DIRECTIONAL COOLING OF BIOLOGICAL MATTER

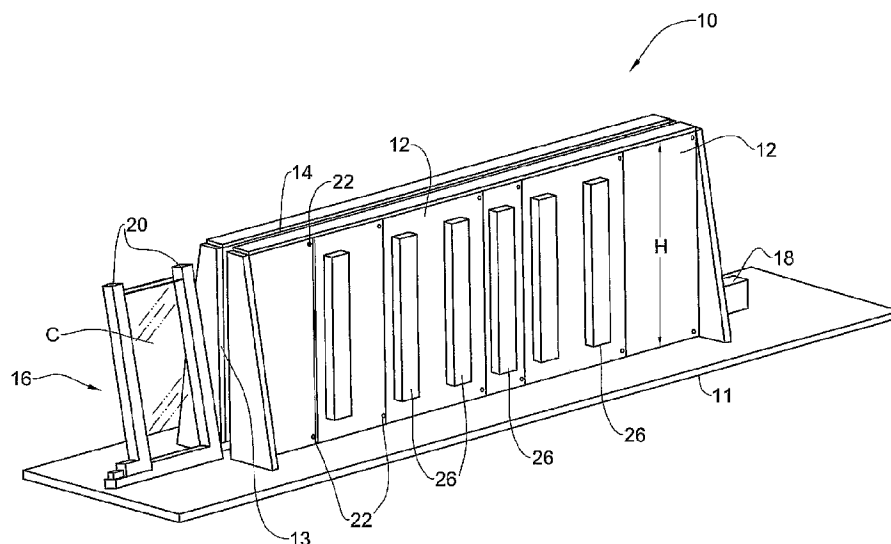

(57) Abstract: The present invention provides an apparatus for freezing a biological sample in a container while it moves along a longitudinal axis of the apparatus. The apparatus comprises at least one set of two cooling plates with inner surfaces having a first plate dimension perpendicular to the axis, and a second plate dimension parallel to the axis. The inner surfaces define a passage therebetween whose width corresponds to the container thickness and which is no larger than the first plate dimension. The first plate dimension is at least as large as the level of the biological sample along the first container dimension during use. The apparatus further comprises a motion unit adapted for movement of the container through the passage along the axis so as to allow cooling of the sample by conduction from the inner surfaces of the plates.



— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

DEVICE FOR DIRECTIONAL COOLING OF BIOLOGICAL MATTER

5

FIELD OF THE INVENTION

This invention relates to controlled freezing biological material, and more particularly to a directional freezing device adapted for that purpose.

BACKGROUND OF THE INVENTION

10 Transfusion of blood to someone who has suffered an injury or undergone a medical procedure resulting in blood loss is a well known and common practice. The transfused blood is typically donated by volunteers, and collected by organizations such as the International Red Cross, Magen David Adom, and private collection centers. Levels of blood donation are seasonal, dropping at
15 certain times during the year, and are also affected by major events, such as the September 11, 2001 attacks on the United States. After such well-publicized events, blood donations tend to soar, often irrespective of need (after the September 11, 2001 attacks on the United States, for example, over half a million units were donated, while fewer than 300 were used for those injured in the
20 attacks). Methods have been developed to store donated blood for future need.

Fresh Red Blood Cells (RBC) can be refrigerated for up to 42 days, after which they are discarded due to RBC recovery falling below 70% (for this reason, over 200,000 units of blood were discarded following the September 11 attacks). Frozen RBC units can be stored for up to 10 years.

25 During freezing of blood, the rate of cooling affects the morphology of the intracellular ice crystals. Maximizing the survival rate of RBCs requires careful control of the freezing process. Conventional freezing devices involve lowering the temperature of the chamber in a controlled stepped manner. The thermal

gradient within the sample is determined implicitly by the temperature of the chamber and the thermal conductivity of the materials of the sample, and is not directly controllable.

US 5,873,254 discloses a device for controlled freezing and warming of a biological sample, and freezing and thawing protocols for which the device is well suited. The device establishes a laterally varying thermal gradient and provides a mechanism for moving the sample along the thermal gradient at a controlled rate of speed. The sample is moved along the thermal gradient at a rate of speed that provides a variable cooling rate or a variable warming rate in accordance with the appropriate protocol. The device also allows continuous seeding of the sample through the freezing process at the exact freezing point of the solution. Real time monitoring and video imaging of the freezing process enable fine tuning of the thermodynamic parameters for improved control. However, the device is suited for small samples.

WO 03/056919 disclose a method for changing the temperature of a sample from an initial temperature via an intermediate temperature to a final temperature. Either the initial or the final temperatures is above the freezing point of said sample and the other is below the freezing point. The method is for changing the temperature of a sample having minimal dimension in each of two mutually perpendicular cross-sections exceeding 0.5 centimeters, and at least one of the cross-sections has an outer zone and an inner zone.

SUMMARY OF THE INVENTION

According to one aspect of the present invention, there is provided an apparatus for freezing a biological sample in a container while it moves along a longitudinal axis of the apparatus. The container has a first container dimension perpendicular to the axis, a second container dimension parallel to the axis, and a container thickness. The first container dimension is defined by the maximum level which the sample may have along the dimension. The apparatus comprises

at least one set of two cooling plates with inner surfaces having a first plate dimension perpendicular to the axis, and a second plate dimension parallel to the axis. The inner surfaces define a passage therebetween whose width corresponds to the container thickness and which is no larger than the first plate dimension.

5 The first plate dimension is at least as large as the level of the biological sample along the first container dimension during use. The apparatus further comprises a motion unit adapted for movement of the container through the passage along the axis so as to allow cooling of the sample by conduction from the inner surfaces of the plates.

10 An apparatus according to the present invention has several advantages. One of the advantages is that it allows for the possibility of large-scale freezing of biological samples using a directional freezing technique.

The apparatus is designed so that the inner surfaces of the plates are parallel to side walls of the containers, and preferably so as to facilitate the movement of the container through the passage. This includes, but is not limited to, ensuring a constant cross section throughout the length of the passage, and providing smooth inner surfaces.

In order to facilitate cooling of the biological sample, each cooling plate may comprise at least one channel adapted for flow of a cryogenic fluid, such as liquid nitrogen, essentially along both plate dimensions. However, the cooling may be accomplished by any suitable means, including, but not limited to, externally mounted tubes adapted for flow of cryogenic fluid therethrough. In addition, there may be provided a heating arrangement, such as electric resistance heaters, in order to better control the cooling process. The apparatus may further have associated with it a feedback control system and monitoring means.

25 According to one embodiment of the present invention, the cooling plates are arranged in a vertical configuration in which the plates are parallel to each other, and their heights, constituting the first plate dimension, define the maximum first container dimension. According to another embodiment, the

cooling plates are arranged in a horizontal configuration, in which one plate is disposed parallel above the other, and their widths, constituting the first plate dimension, define the maximum first container dimension.

According to another aspect of the present invention, there is provided a
5 method of cooling a biological sample. The method comprises providing an apparatus as described above, inserting therein a container containing a biological sample to be frozen, providing a predetermined temperature gradient along the axis, and moving the container through the passage along the axis.

BRIEF DESCRIPTION OF THE DRAWINGS

10 In order to understand the invention and to see how it may be carried out in practice, embodiments will now be described, by way of non-limiting examples only, with reference to the accompanying drawings, in which:

Fig. 1 is a perspective view of an apparatus according to one embodiment of the present invention;

15 **Figs. 2A and 2B** are cross-sectional views of plates according to the present invention;

Fig. 3 is a schematic view of a feedback loop according to the present invention;

Fig. 4A is a schematic view of monitoring means according to the present
20 invention;

Fig. 4B is a schematic view of an alternative arrangement of monitoring means according to the present invention;

Fig. 5 is a perspective view of an apparatus according to another embodiment of the present invention; and

25 **Fig. 6** is a close-up and partially sectioned view of the apparatus of Fig. 5.

DETAILED DESCRIPTION OF THE INVENTION

Fig. 1 illustrates a freezing apparatus **10**, adapted to freeze a container **C** containing a biological sample (not shown), according to one embodiment of the present invention. The freezing apparatus **10** comprises a base **11** and a plurality of vertically oriented plates **12** mounted thereon parallel to longitudinal axis **X** of the device on both sides thereof. Inner surfaces **13** of the plates define between them a narrow passage **14** of width **W** which is throughout their length along the axis **X**. It should be noted that the width **W** may be adjustable. The plates' height **H** is greater than the width **W** of the passage, and may be as small as twice the size thereof.

There is further provided a retention device **16** adapted to grasp the container **C** and a motion unit **18** for moving the retention device through the passage **14**. The motion unit **18** is adapted to move the retention device **16** at various speeds along the passage **14**. According to this embodiment, the retention mechanism comprises two vertical prongs **20**, spaced by a distance **L**, at least one of which may be movable to adjust the distance **L** to suit the container's dimension along the axis **X**. As shown, the container is received between the prongs **20** so as to thermally contact the inner surfaces **13** when inserted, to be cooled by conduction. It should be noted that hereinafter in the specification and claims, the term *contact* should be understood to mean any contact, direct contact or abutting contact, with or without intermediate agent or means.

In order to facilitate easy movement of the container **C** through the passage, while not adversely affecting the cooling, at least one of several features may be present. The container **C** and the inner surfaces **13** may be smooth, further allowing tight contact between the inner surfaces **13** and the container **C** when the container passes through the passage. The container **C** is preferably flexible, so as to allow even distribution of the sample against both inner surfaces **13**.

- 6 -

Alternatively, there may be two thin sheets of a thermoconductive material (not shown) extending between the prongs, or one sheet wrapped around them, defining a rectangular box-shaped void for retaining therein the container. The width of the prongs **20** of the retention device **16** is such so that it slidably fits within the passage **14**. It should be noted that the thin sheets, if provided, serve the dual purpose of retaining the container within the retention device **16** before it is moved within the passage **14** and preventing the container from sticking to the plates **12** during freezing. The first need may be obviated by initially moving the retention device **16**, without the container **C**, into the passage **14** and then placing the container therein through the open top of the passage, or by making the container of a stiff-walled container which is adapted to maintain its shape in the absence of such thin sheets. The second need may be obviated by using a container which is adapted not to stick to the plates **12** during freezing, or by use of the freezing apparatus under conditions, such as low humidity, such that the sticking does not occur.

The plates **12** are of a thermoconducting material, preferably brass, although other suitable materials, such as, but not limited to, aluminum, may be used. The plates **12** comprise channels **24** (seen in Figs. 2A and 2B) formed therein. Upstream and downstream endpoints **23** of the channels are in sealed fluid communication with connections **22**, adapted for ingress and egress of a cryogenic fluid such as liquid nitrogen (LN). A first connection of the pair serves as an inlet for the cryogenic fluid and a second connection serves as an outlet. It should be noted that each plate **12** may comprise one or more channels **24**. The plates **12** further comprise heating elements **26**, which are typically electrical resistance heaters, adapted to further control the temperature, as described in more detail below.

Since the plates **12** are adapted to cool by conduction, it is important to maintain direct contact between them and the container **C**. There may therefore be provided a mechanism for ensuring that the plates maintain a tight contact

even during expanding and contracting of the biological sample within a flexible container. The plates 12, at least on one side, may be mounted on springs in order to automatically adjust to the varying width of the container C and maintain direct contact. Alternatively, the plates 12 themselves may be constructed so that the inner surfaces 13 thereof are biased on springs toward the direction of the passage 14.

As illustrated in Fig. 3, the freezing apparatus 10 further comprises a feedback loop 28. Typically, the feedback loop ensures that an appropriate temperature gradient is provided by the freezing apparatus. The feedback loop 28 comprises temperature sensors 30, which are preferably thermocouples, disposed in strategic locations along the inner surfaces 13 of the plates 12. The temperature sensors 30 are attached, either directly or indirectly, to a processing unit 32. The processing unit 32 is preferably a PLC, but may be any suitable device, such as a computer having control software. The processing unit 32 is preferably capable of controlling the flow of the cryogenic fluid by independently controlling several cryogenic valves 33 in order to produce a preferred temperature gradient along the length of the passage 114. It should be noted that this may be a non-uniform gradient, i.e., where the temperature change per linear distance changes over the length of the axis, or a zero gradient, i.e., where the temperature is constant along the entire length of the axis. The processing unit 32 is also preferably adapted to control the pressure in the supply tank of cryogenic fluid, the heating elements 26, and may be adapted to control the operation of motion unit 18. It may further be adapted to be preloaded with information concerning the size of the sample, desired end temperature, and one or more specific freezing protocols, which may vary depending on the type of biological sample being frozen and/or its intended use. The processing unit 32 may be provided with a display 34 adapted for displaying relevant parameters thereon. The display 34 may be a touch-sensitive screen. The processing unit 32 is also preferably adapted for documenting the freezing process.

As seen in Fig. 4A, the plates may be arranged with gaps 40. In such a case, the freezing apparatus 10 may further comprise monitoring means, which may be disposed in the gaps 40. However, it should be noted that the monitoring means may be arranged above the passage 14, as seen in Fig. 4B, without including gaps. However, the first arrangement has the advantage that the center of the sample is more easily monitored, which, due to the absence of boundary effects inherent with viewing the top edge of the container, is more representative of the condition of the majority of the sample during freezing. The image from the video camera and/or the readings from the thermographs may be presented on the display 34 of the processing unit or on an independent monitor (not shown).

Freezing a biological sample using a freezing apparatus as described above has the advantage that a relatively narrow yet optionally tall container can be used, and still achieve controlled freezing of a large biological sample in a directional manner without extensive damage to cells. For example, a container with dimensions of 10 mm width \times 200 mm height \times 300 mm depth can be used to freeze a 600 ml sample using the freezing apparatus as seen in Fig. 1.

Figs. 5 and 6 show another embodiment of a freezing apparatus of the present invention. For the sake of clarity, elements in the freezer which are similar to elements disclosed in connection with the previous embodiment of Fig. 1 are designated with the same reference numbers shifted by 100.

A freezing apparatus 110 is adapted to freeze a container 100C containing a biological sample. The freezing apparatus 110 according to the present embodiment comprises a base 111 and a plurality of horizontally arranged plates 112 mounted thereon parallel to an axis 100C on both sides thereof. Upper plates 112a are disposed opposite corresponding lower plates 112b. Inner surfaces 113 of the plates define between them a narrow passage 114 of essentially constant height 100H, at least during use, throughout their length along the axis 100X. The upper plates 112a are supported from above by springs (not shown). The springs ensure that a full contact is maintained between the upper plate 112a and

- 9 -

the container. The plates' width **100W** is greater than the height **100H** of the passage, and may be as small as twice the size thereof. The container **100C** and the narrow passage **114** are smooth so that there is tight contact between the inner surfaces **113** and the container **100C** when the container passes through the passage.

There is further provided a clasp **116** adapted to grasp the container **100C** and a motion unit **118** for moving the retention device through the passage **114**. According to this embodiment, the clasp is adapted to pull the container along the axis **100X**.

Although not specifically shown in the figures with reference to the present embodiment, it should be noted that heating and cooling means, as well as feedback and monitoring means, may be provided similarly as in the first embodiment as shown in Figs. 1 through 4.

According to any one of the above embodiments, the narrow passage may be divided into three functional areas. The first area is designated as the *initial chamber*. In this area, the container is initially received, and the sidewalls of the passage **14** may be made of thermally insulating material. The initial chamber may be adapted to hold the container at a predetermined temperature. In addition, the freezing process may be initiated here by seeding. Seeding is accomplished by freezing a very small area of the container **C**, for example, with the cryogenic fluid. It should be noted that the freezing apparatus may be adapted to perform the seeding internal to the chamber, such as described, or external to the chamber, using any device suited for that purpose.

When the seeding is done externally, the container should be positioned is such a way so that the freezing is initiated at a top part of the container. This ensures that the area where seeding is accomplished is largely free of living cells. Before or upon introduction into the passage, the container is rotated so that the area where the seeding had been accomplished is at the front in the direction of motion.

The second functional area is designated as the *freezing block*. In this area, the plates **12** are designed to freeze the biological sample as described above.

The third functional area is referred to as the *collection chamber*. This area is adapted for removal of the container from the device. In addition, the
5 biological sample may be further cooled to extremely low temperatures suitable for long-term storage. In this area, one or more of the plates **12** may be made from a thermally insulating material.

The freezing apparatus according to any of the above embodiments may be used or constructed in such a manner such that the longitudinal axis is
10 oriented vertically. In such a setup, the gradient should be such that the temperature is lower the higher along the axis the container travels. The container therefore is moved upwardly along the axis. This is particularly important when seeding is done internally, since this orientation allows for the cells to descend in the container, and the freezing process is initiated in an area which is largely
15 liquid and devoid of living cells. It should be noted that when the seeding is accomplished externally as described above, the gradient may be oriented so that the container is moved upwardly or downwardly along the axis.

Those skilled in the art to which this invention pertains will readily appreciate that numerous changes, variations and modifications can be made
20 without departing from the scope of the invention *mutatis mutandis*. For example, the freezing apparatus is not limited to having a plurality of plates. It may be constructed using only two plates, one on each side of the narrow passage.

CLAIMS:

1. An apparatus for freezing a biological sample in a container while moving along a longitudinal axis of the apparatus, the container having a first container dimension perpendicular to the axis, a second container dimension parallel to the axis, and a container thickness, the first container dimension being
5 defined by the maximum level which said sample may have along the first container dimension, the apparatus comprising:
 - (a) at least one set of two cooling plates with inner surfaces having a first plate dimension perpendicular to the axis, and a second plate
10 dimension parallel to the axis, defining therebetween a passage whose width corresponds to the container thickness and which is no larger than said first plate dimension, the first plate dimension being at least as large as the level of the biological sample along the first container dimension; and
 - 15 (b) a motion unit adapted for movement of the container through said passage along the axis so as to allow cooling of the sample by conduction from the inner surfaces of the plates.
2. An apparatus according to Claim 1, wherein the plates are oriented vertically, the first plate dimension being the height.
- 20 3. An apparatus according to Claim 1, wherein the plates are oriented horizontally, the first plate dimension being the width.
4. An apparatus according to Claim 1, wherein the inner surfaces of the plates are parallel to side walls of the containers, the inner surfaces being designed so to allow said movement and said cooling.
- 25 5. An apparatus according to Claim 1, further comprising a retention device adapted to hold the container.
6. An apparatus according to Claim 1, further comprising more than one set of cooling plates, wherein at least two of adjacent sets are separated by a gap.

7. An apparatus according to Claim 1, wherein the cooling plates comprise at least one channel adapted for flow of a cryogenic fluid therethrough.
8. An apparatus according to Claim 7, wherein the cryogenic fluid includes liquid nitrogen.
- 5 9. An apparatus according to Claim 1, wherein at least one freezing parameter is controlled by a feedback control system.
10. An apparatus according to Claim 9, further comprising a heating arrangement associated with said cooling plates.
11. An apparatus according to Claim 10, wherein the heating arrangement
10 comprises at least one electric resistance heater.
12. An apparatus according to Claim 9, wherein the feedback control system comprises temperature sensors.
13. An apparatus according to Claim 9, wherein the feedback control system comprises a processor.
- 15 14. An apparatus according to Claim 13, wherein the processor is capable of controlling at least one of the list including flow of cryogenic fluid, pressure of the cryogenic fluid, heating arrangement, and motion unit.
15. An apparatus according to Claim 1, further comprising monitoring means.
- 20 16. An apparatus according to Claim 15, wherein the monitoring means comprises a video camera.
17. An apparatus according to Claim 15, wherein the monitoring means comprises a device capable of taking a temperature measurement of the biological sample during freezing.
- 25 18. An apparatus according to Claim 17, wherein the device is an infrared thermograph.
19. An apparatus according to Claim 1, the apparatus further comprising a first chamber adapted to receive the container, a second chamber adapted to perform the freezing, and a third chamber adapted for removal therefrom of the

container after freezing, said chambers constituting at least a portion of the passage.

20. An apparatus according to Claim 19, adapted to initiate the freezing within the first chamber.

5 **21.** An apparatus according to Claim 1, adapted to initiate the freezing external to the passage.

22. An apparatus according to Claim 21, further adapted to initiate the freezing in an area of the container and to introduce the container into the passage after the initiation, wherein during the initiation the container is disposed
10 such that the area is near the top thereof, and during introduction into the passage the area is near the front thereof in the direction of the movement.

23. An apparatus according to Claim 19, wherein the third chamber is adapted to cool the container to a temperature which is below that achieved as a result of freezing.

15 **24.** An apparatus according to Claim 1, wherein the axis is disposed vertically.

25. An apparatus according to Claim 24, further adapted to initiate the freezing internal to the passage, the movement taking place from a lower portion of the passage to a higher portion of the passage.

20 **26.** A method of cooling a biological sample, the method comprising:
(a) providing an apparatus according to any one of Claims 1 through 25 ;
(b) inserting therein a container containing a biological sample;
(c) providing a predetermined temperature gradient along the axis; and
(d) moving the container through the passage along the axis.

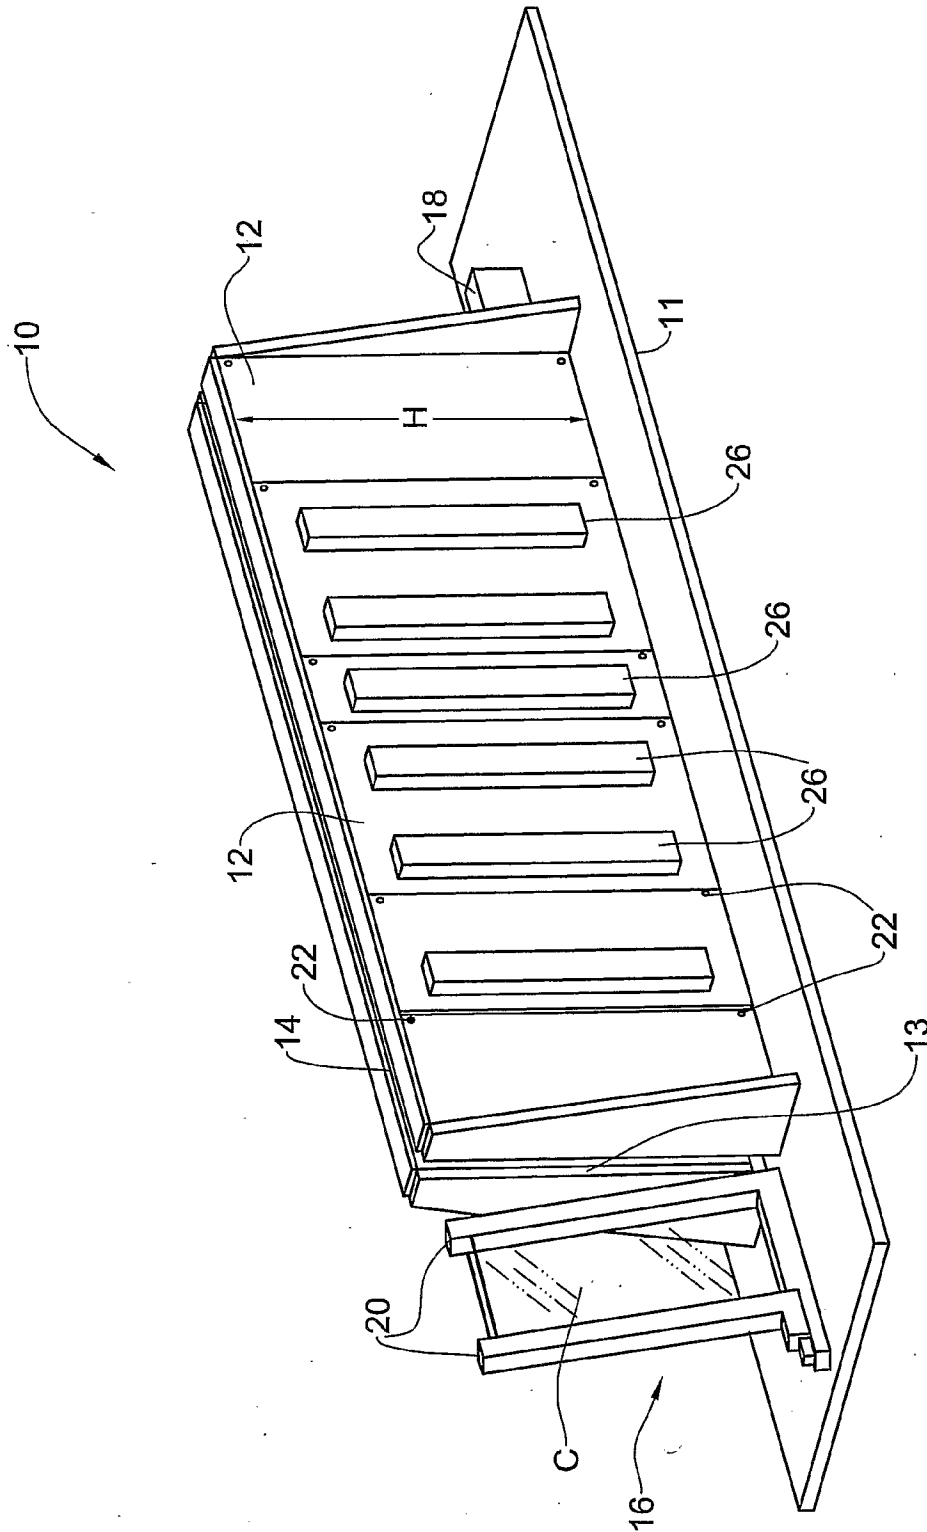


FIG. 1

2/5

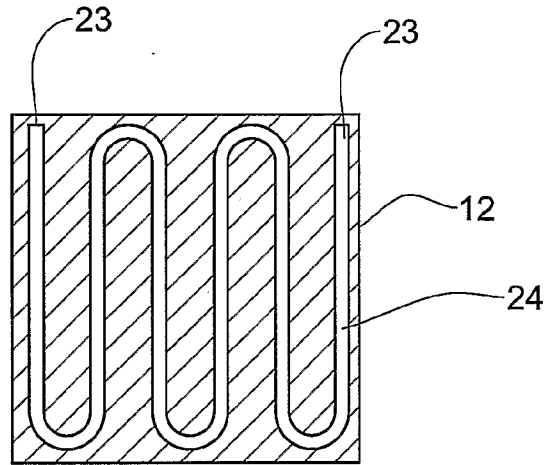


FIG. 2A

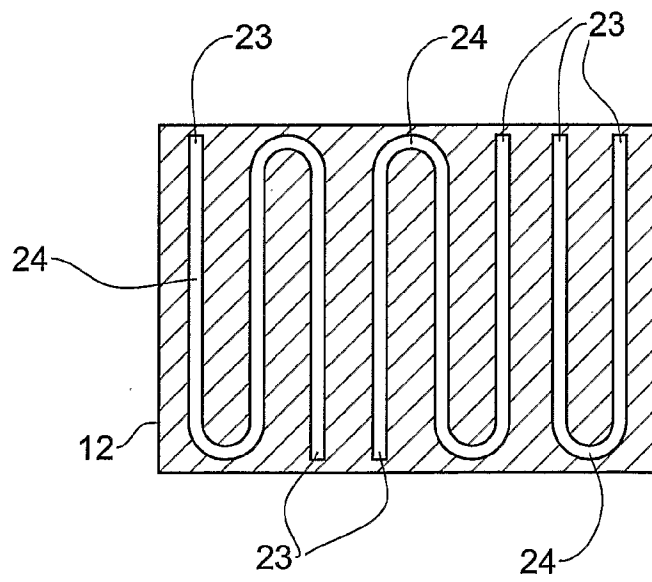
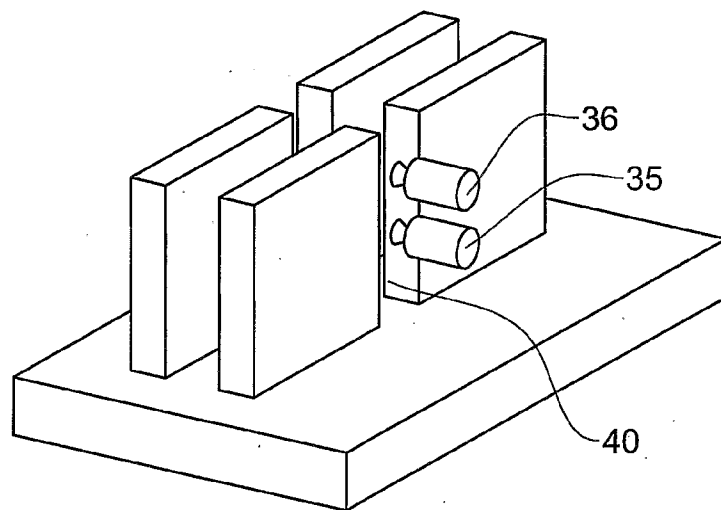
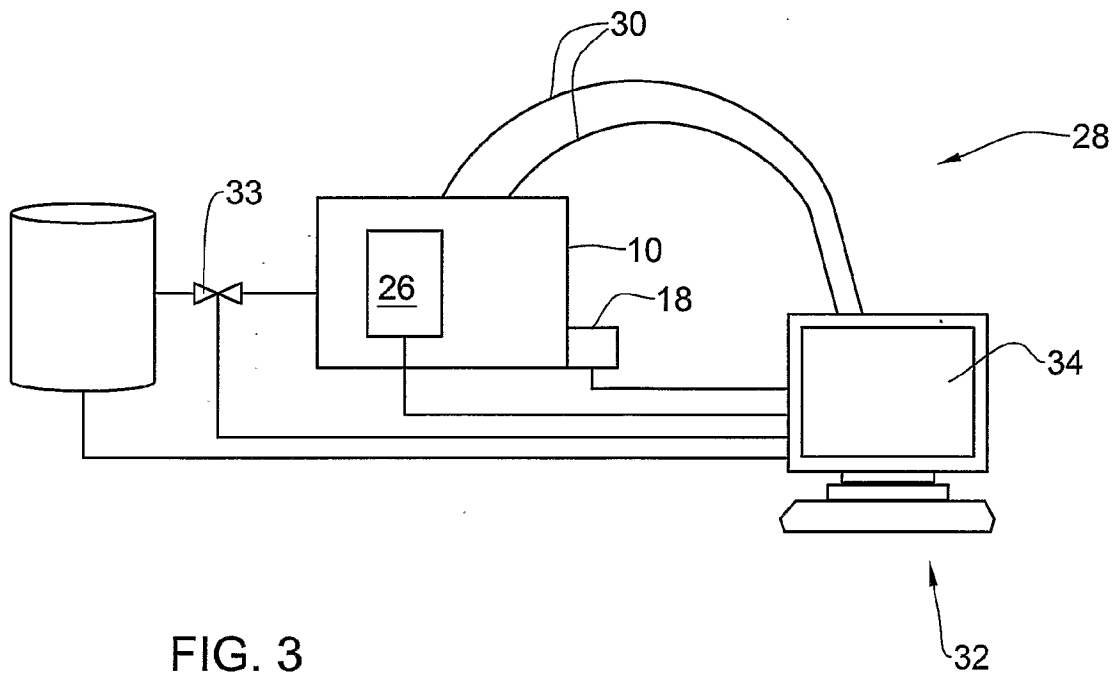


FIG. 2B

3/5





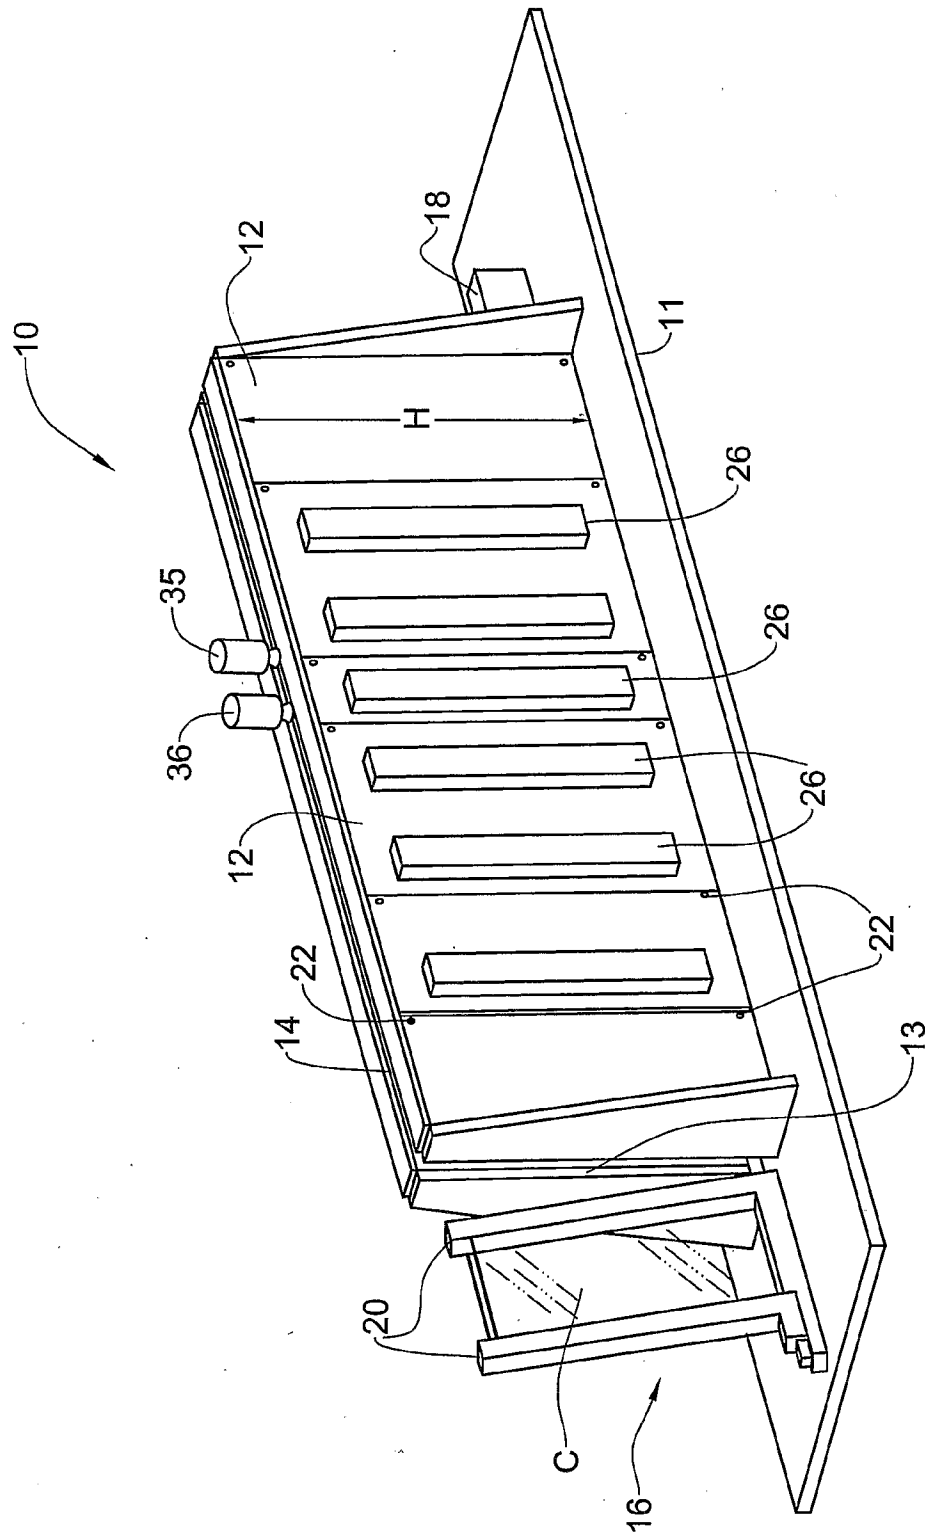


FIG. 4B

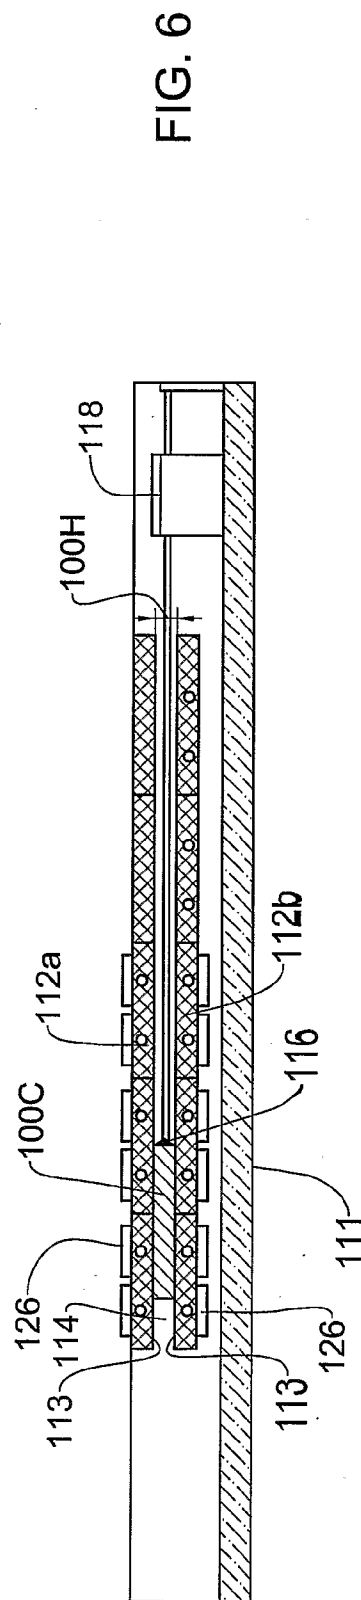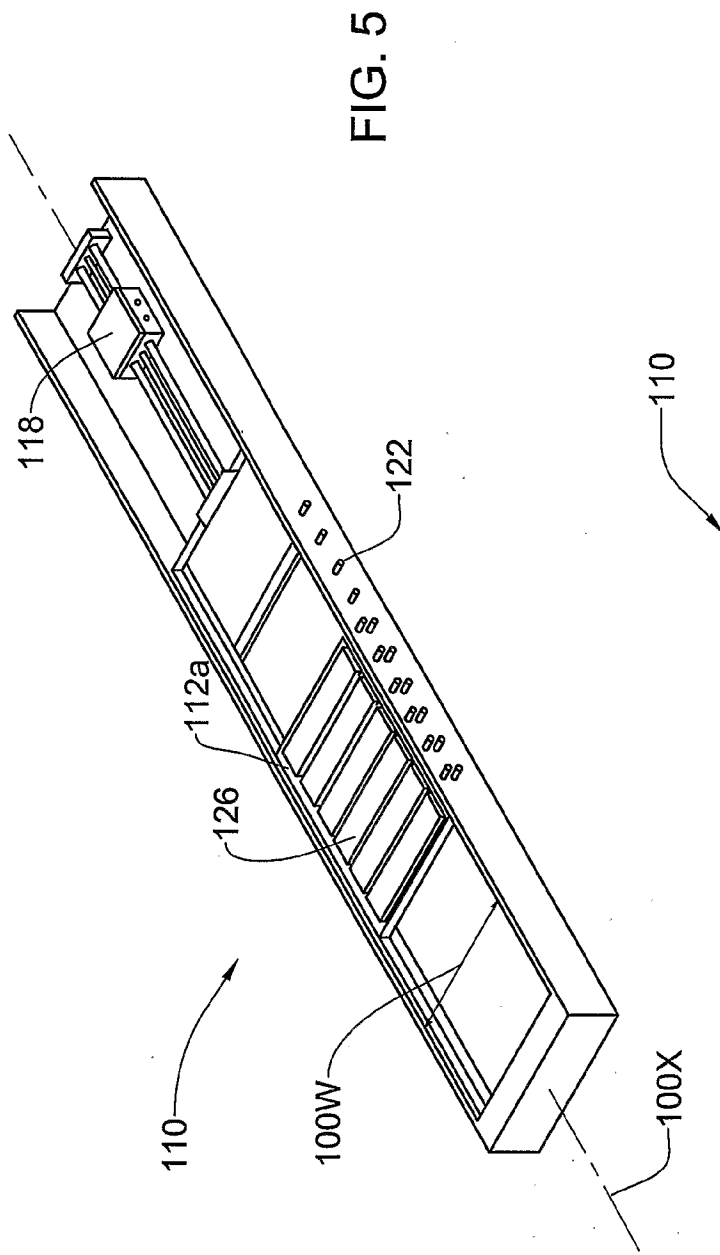

INTERNATIONAL SEARCH REPORT

International Application No
PCT/IL2005/000123

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61M1/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 A61M F25D A01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 873 254 A (ARAV ET AL) 23 February 1999 (1999-02-23) claims 1-14; figure 1a -----	1-26
X	US 2004/006999 A1 (BROWN DAVID C ET AL) 15 January 2004 (2004-01-15) paragraphs '0044! - '0046!, '0052!, '0063!; figures 2-12 -----	1,2,4-9, 12-15
X	US 3 074 247 A (POLK ISAAC H) 22 January 1963 (1963-01-22) claims 1-3; figures -----	1,2,4,7, 24,26
X	DE 196 19 152 A1 (MINGERS, BERND, DIPL.-ING., 47877 WILlich, DE) 27 November 1997 (1997-11-27) column 12, line 32 - column 13, line 1; figure 10 -----	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *Z* document member of the same patent family

Date of the actual completion of the international search

3 June 2005

Date of mailing of the international search report

10/06/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Villeneuve, J-M

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/IL2005/000123

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5873254	A	23-02-1999	AU 4244797 A EP 0925475 A1 WO 9810231 A1	26-03-1998 30-06-1999 12-03-1998
US 2004006999	A1	15-01-2004	US 2003079482 A1 US 2003080126 A1 AU 2003275139 A1 AU 2003278853 A1 CA 2498718 A1 WO 2004027331 A2 WO 2004026661 A1 US 2005011202 A1 US 2004129003 A1 US 2004134203 A1 CA 2466122 A1 CA 2466130 A1 EP 1441585 A1 EP 1441586 A1 JP 2005507692 T WO 03037082 A1 WO 03037083 A1	01-05-2003 01-05-2003 08-04-2004 08-04-2004 01-04-2004 01-04-2004 01-04-2004 20-01-2005 08-07-2004 15-07-2004 08-05-2003 08-05-2003 04-08-2004 04-08-2004 24-03-2005 08-05-2003 08-05-2003
US 3074247	A	22-01-1963	NONE	
DE 19619152	A1	27-11-1997	AU 2953597 A DE 29623509 U1 DE 59704132 D1 WO 9743586 A1 EP 0897517 A1	05-12-1997 03-09-1998 30-08-2001 20-11-1997 24-02-1999